

Please read this data sheet before purchasing, and keep it on file for future reference. It contains important information on the product specifications.

Optocom

Optoelectronics Group

OPT3285-5X

CWDM OC-12

**Optical Transmitter with
Optical Isolator**

Data Sheet

2004/5



210 Andover Street, Wilmington, MA 01887

Contents

General	3	Description
	3	Applications
	3	Standards Met
Function	3	Operation Features
	3	Operation Suggestions
	3	User Options
Ratings	3	Absolute Maximum Ratings
Operating Characteristics	4	Electrical
	4	Optical
	5	Transmitting Wavelengths
	5	Eye Mask & Typical Output Waveform
Physical	6	Outline Diagram
	6	Dimensions
	7	Mounting & Connections
	7	Pin Designations
Safety	7	Laser Compliance Statement
	8	Optical
	8	Electrical
	8	Other
Appendix	8	Terms
Additional Information	8	Contact

General

Description

The OPT3285-5X is a 20-pin DIP fiber optic transmitter module which converts electrical data signals to lightwaves in the 1.5 μm band at data rates from 1 Mbps to 650 Mbps. The transmitter consists of a hermetic, 1.5 μm , InGaAsP/InP MQW DFB laser and a circuitry providing modulation, automatic optical power control and thermal compensation.

Applications

The device is designed for data communication systems and telecommunication transmission systems over singlemode fiber.

Standards Met

The specifications met are: the SONET/SDH STS-12/STM-4 interface, the Long Reach OC-12 Optical Parameters (LR-2, LR-3) of Bellcore GR-253-CORE, the Long-haul Recommendation (L-4.2) of ITU-T G.957, and the monitor & alarm

requirements of Bellcore GR-253-CORE & ITU-T G.783 and G.958.

Function

Operation Features

The OPT3285-5X optical transmitter operates using either a single +5 V or -5 V power supply. The device maintains electrical and optical stability over the specified temperature and voltage ratings. Outputs include the laser bias current monitor (LBM) voltage and the laser backface monitor (BFM).

Operation Suggestions

Operator can disable optical output through a user-provided electrical input.

User Options

For further uses of LBM and BFM, refer to Bellcore GR-253-CORE & ITU-T G.783.

Ratings

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage*	$V_{CC}-V_{EE}$	0	6.0	V
Operating Case Temperature Range	T_C	0	70	$^{\circ}\text{C}$
Operating Relative Humidity (non-condensing)	H_{OP}	---	85	%
Lead Soldering Temperature/Time	T/t	---	250/10	$^{\circ}\text{C}/\text{s}$
Minimum Fiber Bend Radius	R_F	32/1.25	---	mm/in.
Storage Case Temperature Range	T_{STG}	-40	85	$^{\circ}\text{C}$

* With V_{CC} and V_{EE} connected to (+5 V, 0 V) respectively, or with V_{CC} and V_{EE} connected to (0 V, -5.2 V) respectively.

Operating Characteristics

Electrical

Parameter	Symbol	Min	Typ	Max	Unit
dc Power Supply Voltage	$V_{CC} - V_{EE}$	4.75	5.0	5.25	V
dc Power Supply Current	I_{CC} OR I_{EE}	---	0.1	0.2	A
Input Data Voltage: ^{1,2}					
Low	V_{IL}	-1.95	-1.8	-1.45	V
High	V_{IH}	-1.16	-0.9	-0.7	V
Input Swing ³	V_{PP}	250	---	1000	mV
Common Mode Range	V_{CM}	$V_{CC} - 2.5$	---	$V_{CC} - 0.5$	V
Input Transition Time ⁴	t_i	---	1.6	2.2	ns
Transmitter Disable Voltage ⁵	V_D	$V_{CC} - 2.0$	---	V_{CC}	V
Transmitter Enable Voltage	V_{EN}	V_{EE}	---	$V_{EE} + 0.8$	V
Laser Bias Voltage ⁶	V_{LB}	0.01	---	0.45	V
Laser Facet Voltage ⁷	V_{BF}	0.01	---	0.20	V

¹ It is recommended for optimum performance to use \overline{DATA} & \overline{DATA} inputs simultaneously.

² Data inputs are 10K, 10KH, 100K, 10E, and 100E ECL compatible. Voltage is in reference to VCC.

³ The input swing, is measured as the absolute difference between \overline{DATA} & \overline{DATA} inputs.

⁴ Between 10% and 90% (50% duty cycle).

⁵ The transmitter remains enabled and requires the user to provide an external voltage to disable.

⁶ The laser bias current is determined to be the ratio of the voltage to an internal 10 Ω current-sensing resistor.

⁷ Laser facet current is determined to be the ratio of the voltage to an internal 200 Ω current-sensing resistor.

Optical

Parameter	Symbol	Min	Typ	Max	Unit
Average Power Output ¹	P_O	+1	+2	+3	dBm
Operating Wavelength Range	λ	$\lambda_C - 5.5$	λ_C	$\lambda_C + 7.5$	nm
20 dB Spectral Width (SLM Laser)	$\Delta\lambda_{20}$	---	---	1	nm
Side-mode Suppression Ratio (SLM Laser)	SSR_{min}	30	---	---	dB
Extinction Ratio ²	E_r	10	---	---	dB
Optical Rise & Fall Times ³	t_R, t_F	---	---	0.6	ns
Jitter Generation, rms ⁴	GJ	---	---	0.005	UI
Output Waveform ⁵	SONET SDH Compliant				

Operating Characteristics - continued

¹ Measured using an electrical input with a $2^{23} - 1$ pseudorandom word having a 50% duty factor. It is also suitable to use additional measurement parameters and techniques specified in ITU-T Rec. G.957 and Bellcore GR-253-CORE. Optical loss of pigtail termination connector and measurement uncertainty is included in the numbers specified.

² The ratio of logic "1" to logic "0" average power levels calculated as $10\log_{10}(P_1/P_0)$ in dB.

³ Measured with a 50% duty factor from the 10% to 90% points.


⁴ ITU-T Rec. G.958 and Bellcore GR-253 CORE (for Category II interfaces) list a fraction of the maximum amount of allowable generated jitter to allow for additional sources of jitter within the system. These ITU-T and Bellcore documents include information for measurement bandwidth specifications and techniques.

⁵ The optical output meets the eye diagram mask determined by GR-253-CORE (Fig. 4.2 of GR-253-CORE).

Transmitting Wavelengths

Product Code	Wavelength, λ_c
OPT3285-5A	1470
OPT3285-5B	1490
OPT3285-5C	1510
OPT3285-5D	1530
OPT3285-5E	1550
OPT3285-5F	1570
OPT3285-5G	1590
OPT3285-5H	1610

Eye Mask & Typical Output Waveform

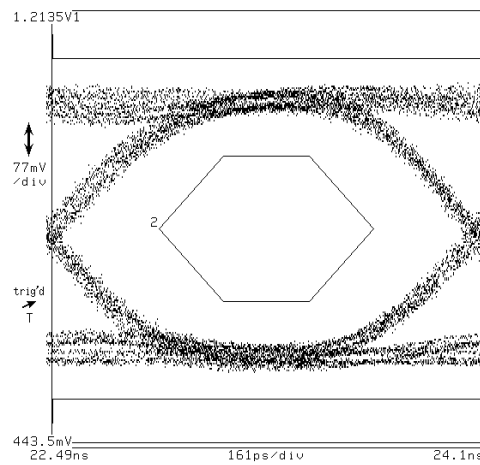


Bessel-Thomson filtered typical output waveform.

Physical

The device package conforms to the 20-pin DIP outline shown in Figure 1. Dimensions for the package are also given in its corresponding Dimensions table.

Outline Diagram

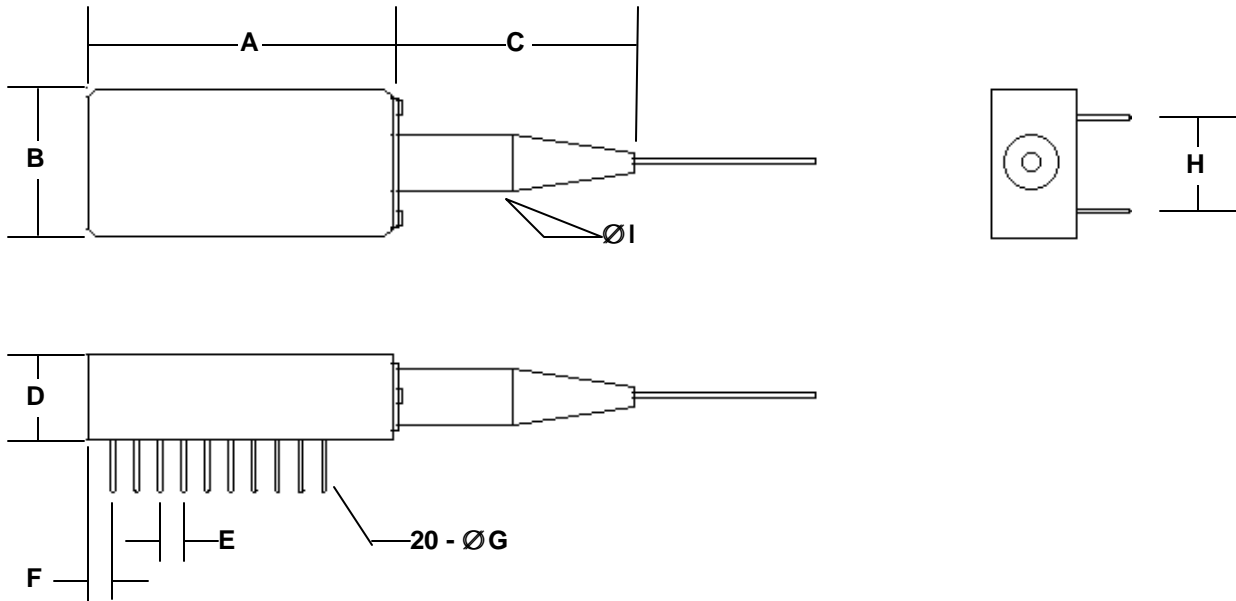

Dimensions

Dimension	Typ	
	Inches	Metric (mm)
A	1.300	33.0
B	0.635	16.13
C	1.000	25.40
D	0.365	9.27
E	0.100	2.54
F	0.110	2.79
ØG	0.018	0.46
H	0.400	10.16
ØI	0.236	6.00

Physical - continued

An assigned serial number in both barcode and human readable formats appear on this device.

All markings and labels are permanent and meet the requirements of MIL-STD-883C-2015.7.

Mounting and Connections

The pigtail has an integrated single stage optical isolator aligned to a single-mode (SM) fiber with an 8 μm core. The outer jacket has a nominal 900 μm diameter and is terminated with an

ST^{®*}, FC, or SC Connector. Other connector types may be available upon request. The minimal pigtail length is 1 meter (39.4 inches) long.

* ST[®] is a registered trademark of AT&T

Pin Designations

Pin	1	2	3	4	5	6	7	8	9	10
	NC	LBM(+)	NC	LBM(-)	V _{EE}	V _{CC}	DISABLE	V _{CC}	V _{CC}	NC
Pin	20	19	18	17	16	15	14	13	12	11
	NC	BFM(+)	V _{CC}	BFM(-)	DATA(+)	DATA(-)	V _{EE}	Case GND	V _{CC}	Case GND

Safety

Laser Compliance Statement

The OPT3285-5X is classified as a:

- Class 1 Laser Product
- Laser Klasse 1
- Luokan 1 Laser laite
- Appareil A Laser De Classe 1
- Klass 1 Laser Apparat.

The OPT3285-5X is certified in the U.S. to conform to the requirements of the Department of Health & Human Services 21 Code of Federal Regulations (DHHS 21 CFR) Subchapter J of the FDA for Class 1 Laser Products.

 Caution - use of device other than those specified herein may result in hazardous laser radiation exposure. Please embrace all customary precautions & discretion while handling this device.

Safety - continued

Optical	<ul style="list-style-type: none">• Avoid direct eye exposure to laser beam projection area or a broken fiber under operation.
Electrical	<ul style="list-style-type: none">• Warning against overvoltages or current surges as these may cause failure, electrical shock or fire.• Solder leads to electronics entirely so as to eschew short circuits.• Solder or plug in device while power is turned off.
Other	<ul style="list-style-type: none">• Avoid storage above maximum temperature rating & other extreme conditions.• Avoid device disassemblment as damages may be incurred.• Avoid excessive force to fiber pigtail and bending beyond a 20 mm radius.• Take normal handling precautions as for all electrostatic sensitive devices.

Appendix

Terms

BFM: indicates the laser output power

LBM: indicates the total amount of dc current supplied to the laser

NC: not connected

Additional Information

Contact

For additional information, product specifications, or information about Optocom:

Internet: <http://www.optocom.com>

Email: Info@optocom.com

Tel: +1 978 988 8711

Fax: +1 978 988 8722

© 1999-2005 Optocom Corporation. All rights reserved. Reproduction in whole or in part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract and is believed to be accurate and reliable and may be subjected to change without notice. No liability will be accepted by the publisher for any consequence of its use.